
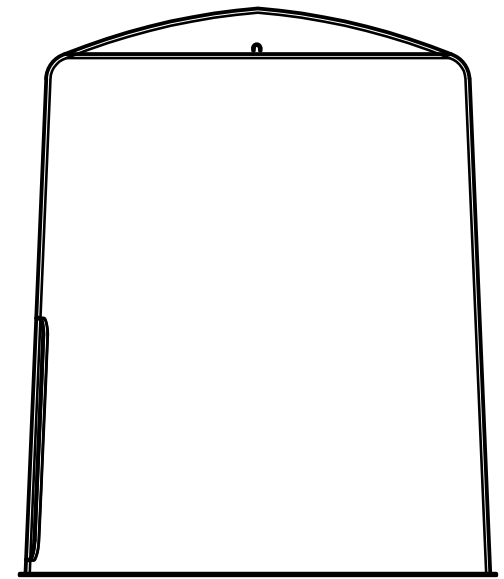
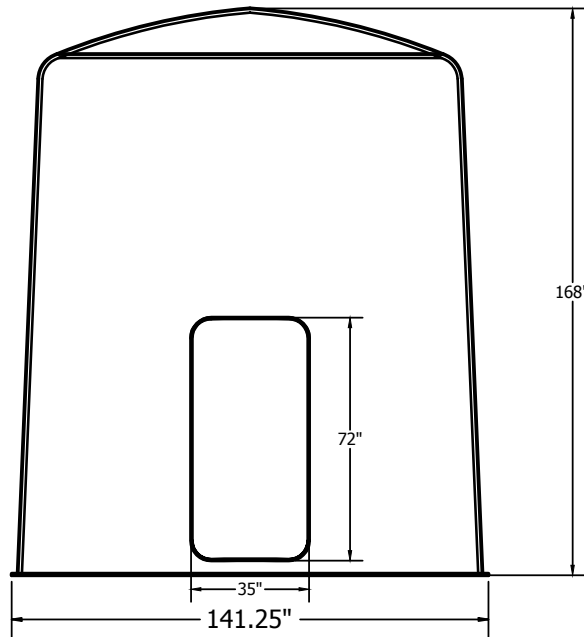


- **Double-wall Construction:** MOCOAT® shelters are double-walled with encapsulated urethane foam insulation
- **Outer and Inner-FRP:** Fibreglass Reinforced Polyester Shell ( $\frac{1}{8}$ " thick nom.)
- **Standard 1" Urethane Foam Insulation core**
- **R-12** Insulation value for composite construction
- **Balsa wood & steel frame reinforced door construction**
- **Door size:**
  - 35" x 72" for **MC 11 10 14**
- **Lockable door latch c/w:**
  - Door deck chain, plated lift lug
  - Hinges (c/w backing plates)
- **Tan exterior with White interior**
- **Top mounted lift lugs c/w backing plates**

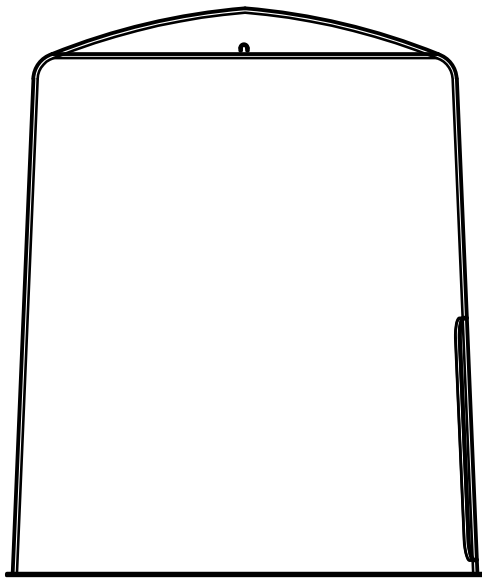

10/9/2018

Ownership of Documents  
 This document, the ideas and designs incorporated herein, as an instrument of service, is the property of Mocoat Solutions and is NOT to be used in whole or in part for any other project without the written permission of, Mocoat Solutions.

CLIENT:	
LOCATION:	
PROJECT:	
WORK ORDER NO:	DD1MMYY
QUOTE NO:	1010918
SIZE: MC 11 10 14	REV NO: BY: MW